
# CM350-LS

## MOBILE MID-RISE SCISSOR



Technical Data	Lifting capacity	3500 kg
	Lifting height	1000 mm
	Working height	105 mm – 1000 mm
	Lifting / lowering time	approx. 20 seconds
	Motor unit	2.2 kW
	Voltage	230V 50Hz 1 Phase (single phase only)
Scissor Platforms	Platform Length	1420 – 2100 mm
	Platform Width	525 mm
	Distance Between Platforms	900 mm
	Max. distance scissor - control box	2500 mm
	Minimum Height	105 mm



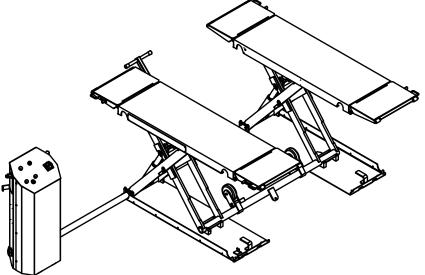

#### **Description:**

- Double master / slave hydraulic system, no compressed air or safety lock necessary
- Control box with push buttons, integrated pump unit and alarm signal
- Emergency lowering valves can be manually opened
- Sturdy scissor construction for high directional stability
- Ramps made from tear plates, for easy drive-on with wet wheels
- Mechanical synchronisation through cross bar
- Low minimum height of 110mm suitable for low vehicles and drive over situations.
- No fixed drive on direction, control box can be installed either side of scissors.
- Mobile kit delivered as standard consisting of rollers and handle for easy manoeuvrability of scissor

#### **Standard Colours:**

- Platforms: Galvanized
- Scissor: RAL 2002 Red
- Custom colours available

### Extras & Accessories


- Range of rubber blocks
- Cross bar for lifting 4x4 vehicles

#### **Service & Suppport**

- 3 year warranty
- Spare parts stocked locally in Australia for 24 working hour dispatch

Specifications/Images subject to change without prior notice. To validate warranty, proof of a valid maintenance contract will be required. Images and Illustrations are indicative and may be modified without notice



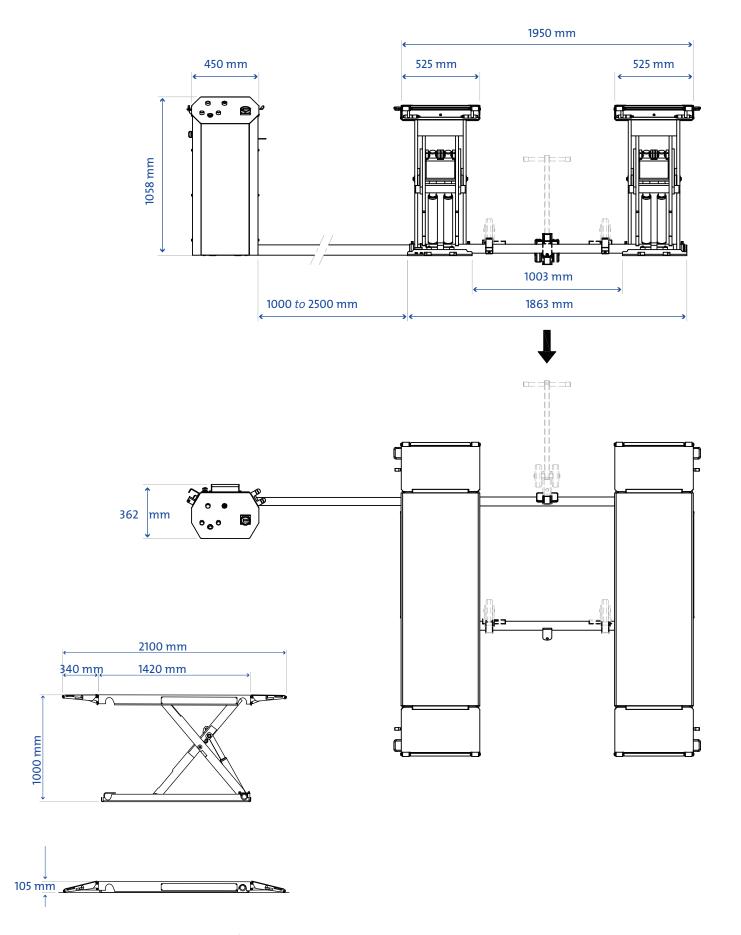

 $Specifications/Images\ subject\ to\ change\ without\ prior\ notice.\ To\ validate\ warranty,\ proof\ of\ a\ valid\ maintenance$ contract will be required. Images and Illustrations are indicative and may be modified without notice



For more information, please contact MOLNAR or your local MOLNAR representative

**J 1300 MOLNAR** (1300 665 627)



