CM5500-AL



WHEEL ALIGNMENT SCISSOR HOIST

Technical Data	Lifting capacity	5500 kg
	Lifting height	2040 mm
	Working height	165 mm – 2040 mm
	Lifting / lowering time	approx. 45 seconds
	Motor unit	3.0 kW
	Voltage	400V 50-60Hz 16A
Scissor Platforms	Platform Length	5208 mm
	Platform Width	690 mm
	Distance Between Platforms	780 mm
	Max. distance scissor - control box	2000 mm
	Minimum Height	165 mm



Description:

- Double master / slave hydraulic system
- Control box with push buttons, integrated pump unit and alarm signal
- Emergency lowering valves can be manually opened
- Sturdy scissor construction for high directional stability
- Ramps made from tear plates, for easy drive-on with wet wheels
- Automatic leveling system with master/slave hydraulic circuit
- Adjustable mechanical safety device
- Adjustable recess for turntable installation

Standard Colours:

Platforms: RAL 9005 - BlackScissor: RAL 2002 - Red

Slip plates: RAL 1003 - Yellow
Custom colours available

Extras & Accessories


- One or two jacking beams for wheels free
- Front and rear crossbars for additional level support
- LED lighting set

Service & Suppport

- 3 year warranty
- Spare parts stocked locally in Australia for 24 working hour dispatch

Specifications/Images subject to change without prior notice. To validate warranty, proof of a valid maintenance contract will be required. Images and Illustrations are indicative and may be modified without notice



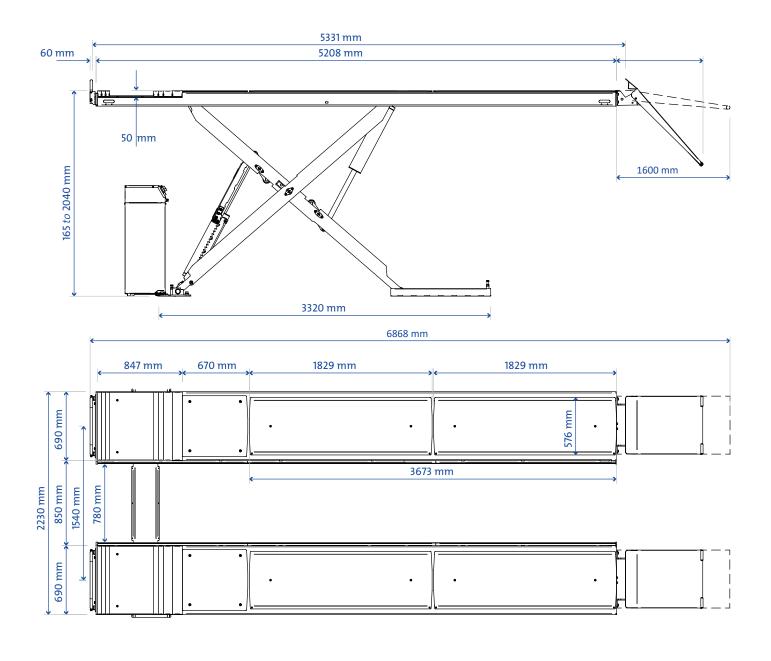

 $Specifications/Images\ subject\ to\ change\ without\ prior\ notice.\ To\ validate\ warranty,\ proof\ of\ a\ valid\ maintenance$ contract will be required. Images and Illustrations are indicative and may be modified without notice

