


The safe and efficient system for Molnar Two Post Hoist arm positioning

AUTO ARM LOCKS



**M
O
L
N
A
R**

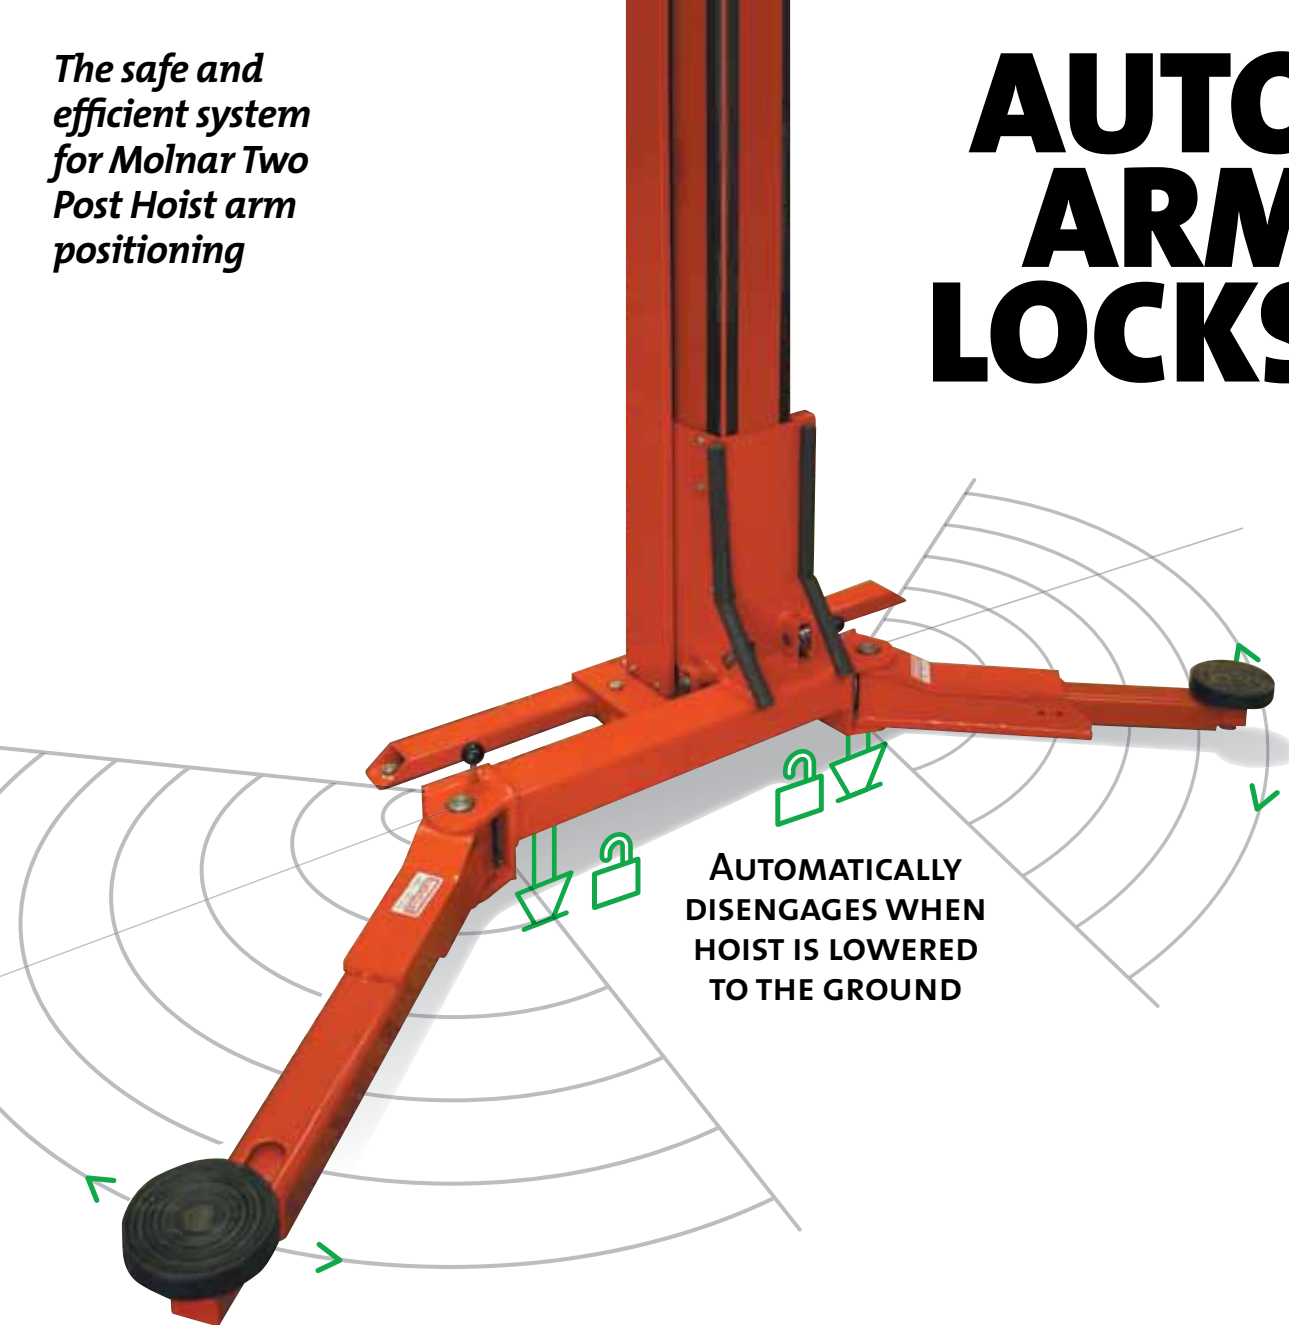

**AUTOMATICALLY
DISENGAGES WHEN
HOIST IS LOWERED
TO THE GROUND**

FEATURES

- Can be operated manually; quickly and easily at any height
- Automatically disengages when hoist is lowered to the ground.
- 'Standard' on current Molnar Two Post Hoists, can be retro-fitted to older Molnar Two Post hoists
- Automation saves time
- No back bending
- Allows wider arm opening for easier drive in access
- Height adjustable for sloping or uneven floors
- 'Shielded' internal mechanism
- Laser cut teeth deliver superior strength through a large cross sectional area

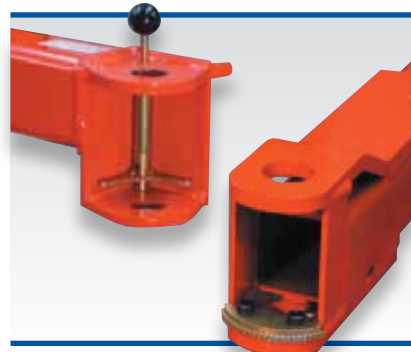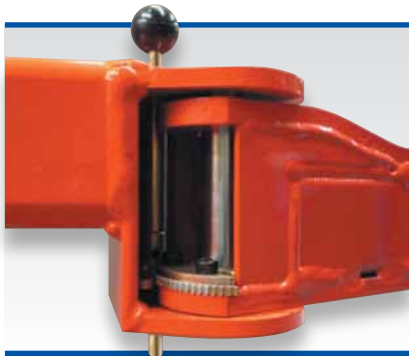

As the policy of Molnar Hoists is one of continuous improvement, the manufacturer reserves the right to change specifications without notice.



For more information, please contact us or your local Molnar Representative

T 08 7120 8700 F 08 8346 0097
E sales@molnarhoists.com.au
www.molnarhoists.com.au

onwards & upwards

