


4488SA-EL

4 TONNE 'WIDE'
FOUR POST HOIST



M O L N A R

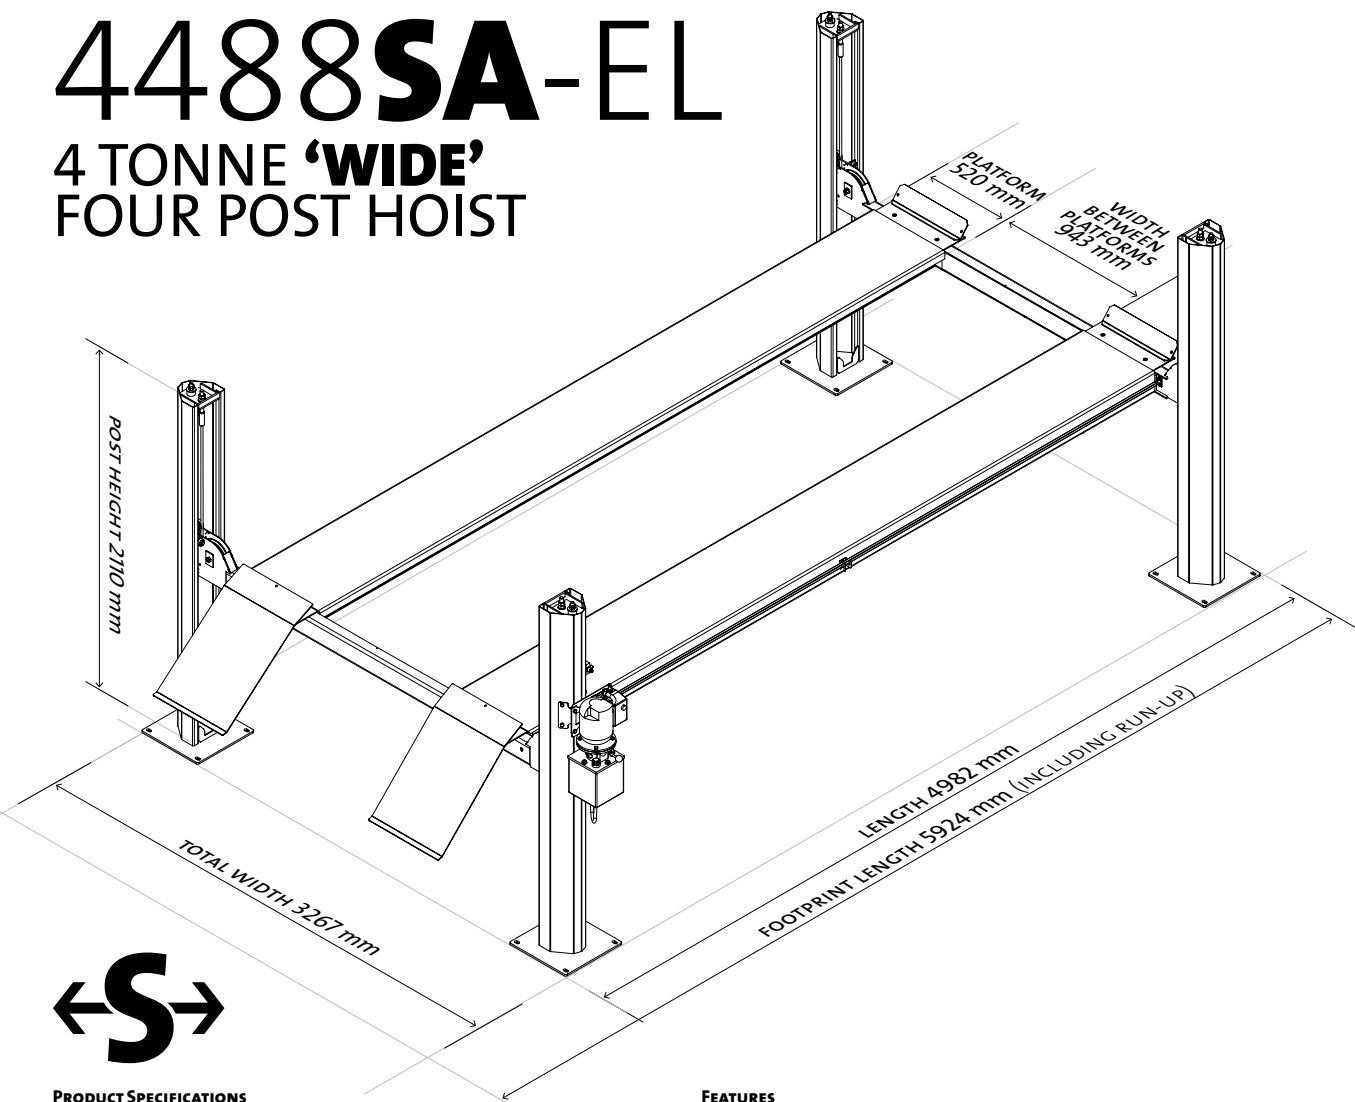

HOISTS

PRODUCT SPECIFICATIONS

Footprint	3267 x 5924 mm (including run-ups)
Length	4982 mm
Width	3267 mm
Height	2110 mm
Width Between Posts	2700 mm
Width Between Platforms	943 mm
Platform Length	4580 mm
Platform Width	520 mm
Run-Up Length	1180 mm
Motor	3 Phase, 3 HorsePower, 415 Volt * (requires 3 Phase and Earth, 5 Amp)
Lifting Capacity	4 tonnes
Maximum Raised Height	1675 mm
Minimum Lowered Height	170 mm
Minimum Lifting Time	24 seconds
Concrete Depth	min 100 mm, mesh reinforced, min strength 25 MPa
Hydraulic Oil	high quality, 46 weight, anti-wear
Gross Weight	1020 kg
Shipping Dimensions	5.0 x 0.95 x 0.6 metres
Finish	powder coated for added durability
Warranty	3 years

FEATURES

Extra Wide	ideal for servicing trade vehicles, vans, four-wheel-drives or small trucks
Operational	40mm incremental height adjustment push button to lift; lever to lower single lever locks all four posts
Safety	deadman controls (automatic stop when released) protection for cable breakage, overload and hydraulic failure
Service & Installation	comprehensive service manuals and installation instructions included

CUSTOMISATION

	control unit position
Colour	extensive range of powder coated colours available
4488SA-EL-240VOLT *	optional single phase, 240 Volt motor (requires 240 Volts under load at motor, hard wired on 20 Amp circuit)
Extra Long	1 metre longer (5982 mm platforms)

OPTIONAL ACCESSORIES

JB11A	Air Jacking Beam, Wide (for wheel free service options)
4488-S/W-66	Four Post Run-Ups, Short (815 mm)
4488-S/W-66EL	Four Post Run-Ups, Long (1190 mm)
7252-023-01-A	Jack Stand, Wide (insert between platforms; turn upside down for a tool tray)

As the policy of Molnar Hoists is one of continuous improvement, the manufacturer reserves the right to change specifications without notice.



For more information, please contact
us or your local Molnar Representative

T 08 7120 8700 F 08 8346 0097
E sales@molnarhoists.com.au
www.molnarhoists.com.au

onwards & upwards