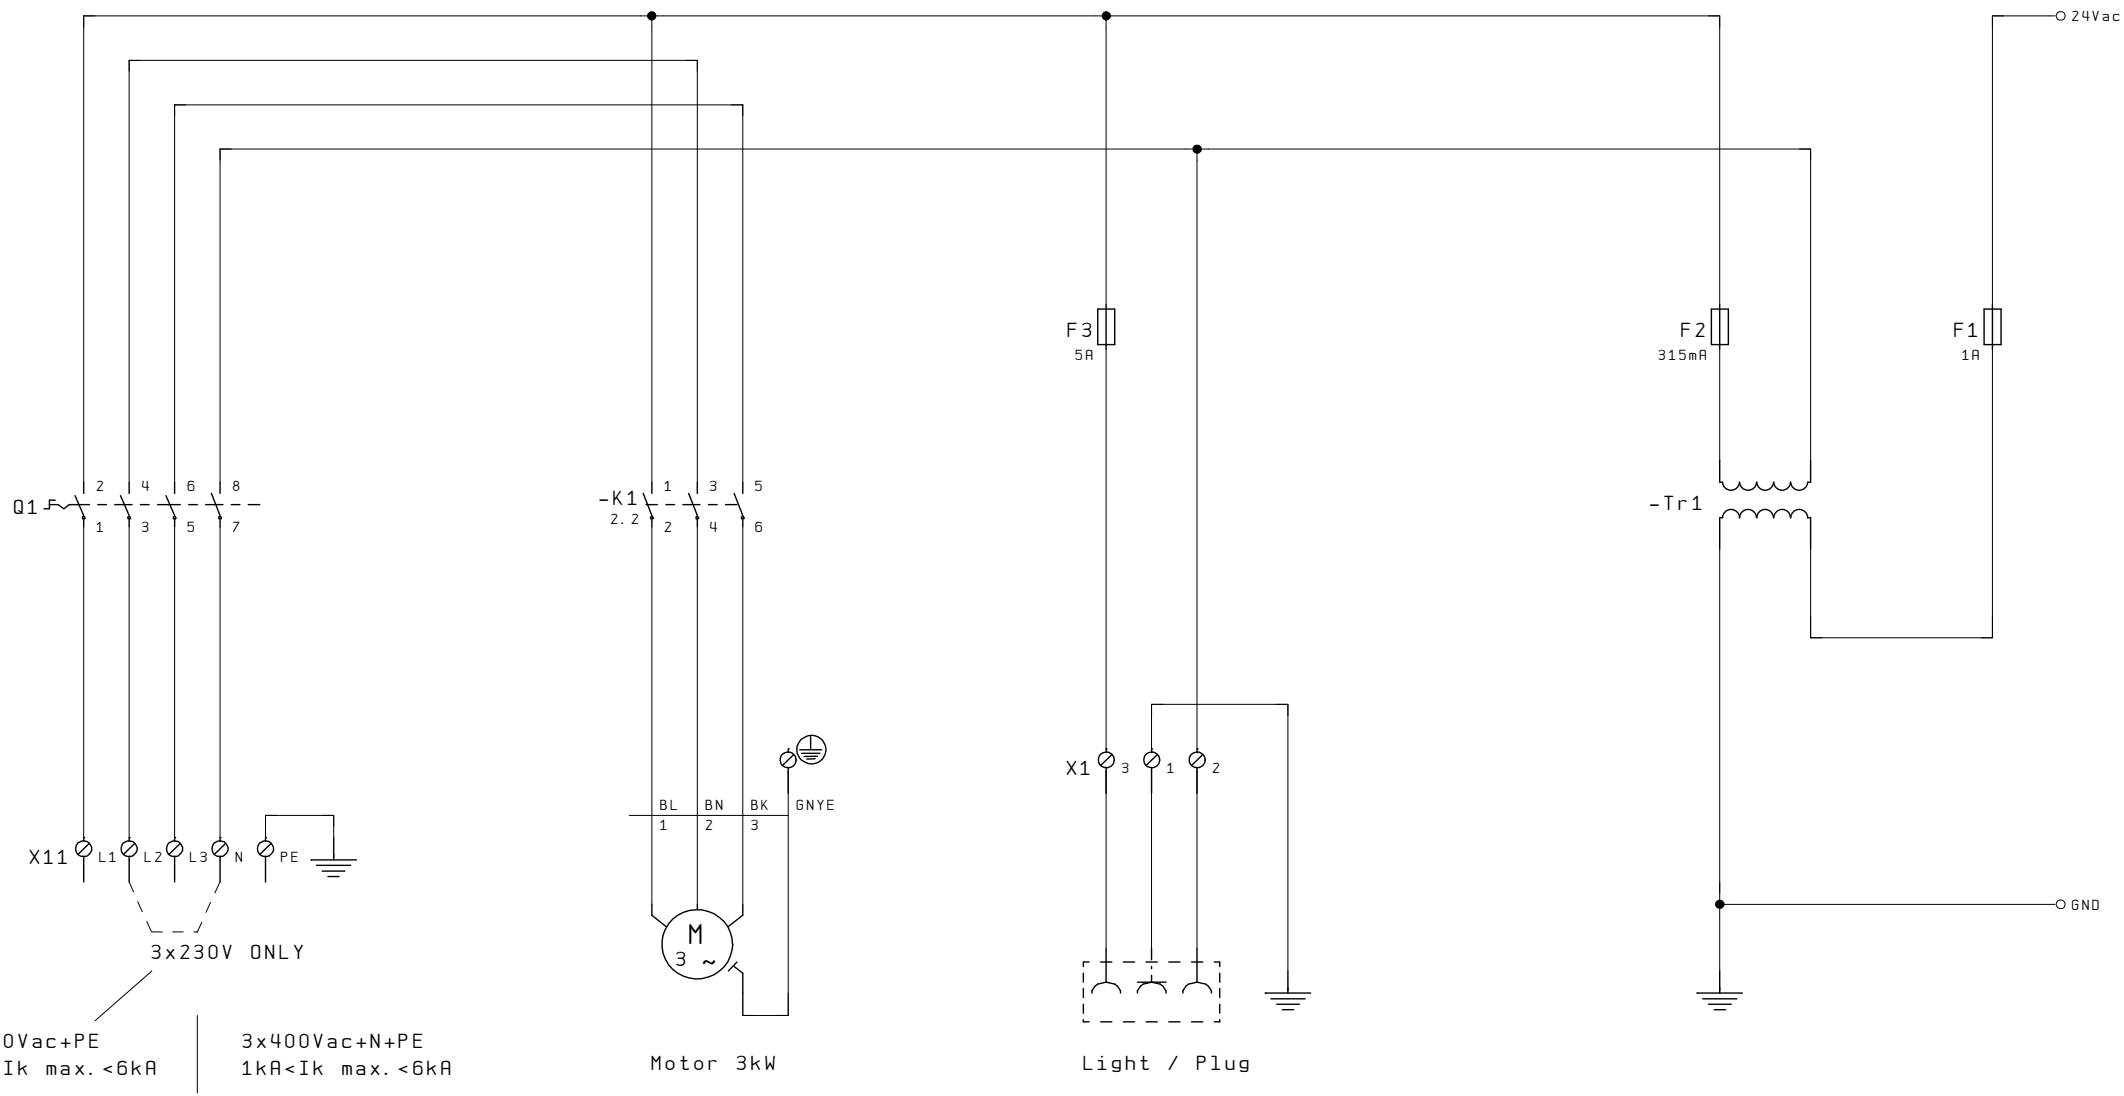

REV.	5
Project date	14. Mar. 2007
Printed	09. Sep. 2019

Nøgleskema - H4

Schematic nr. T50529

Page 1 of 4

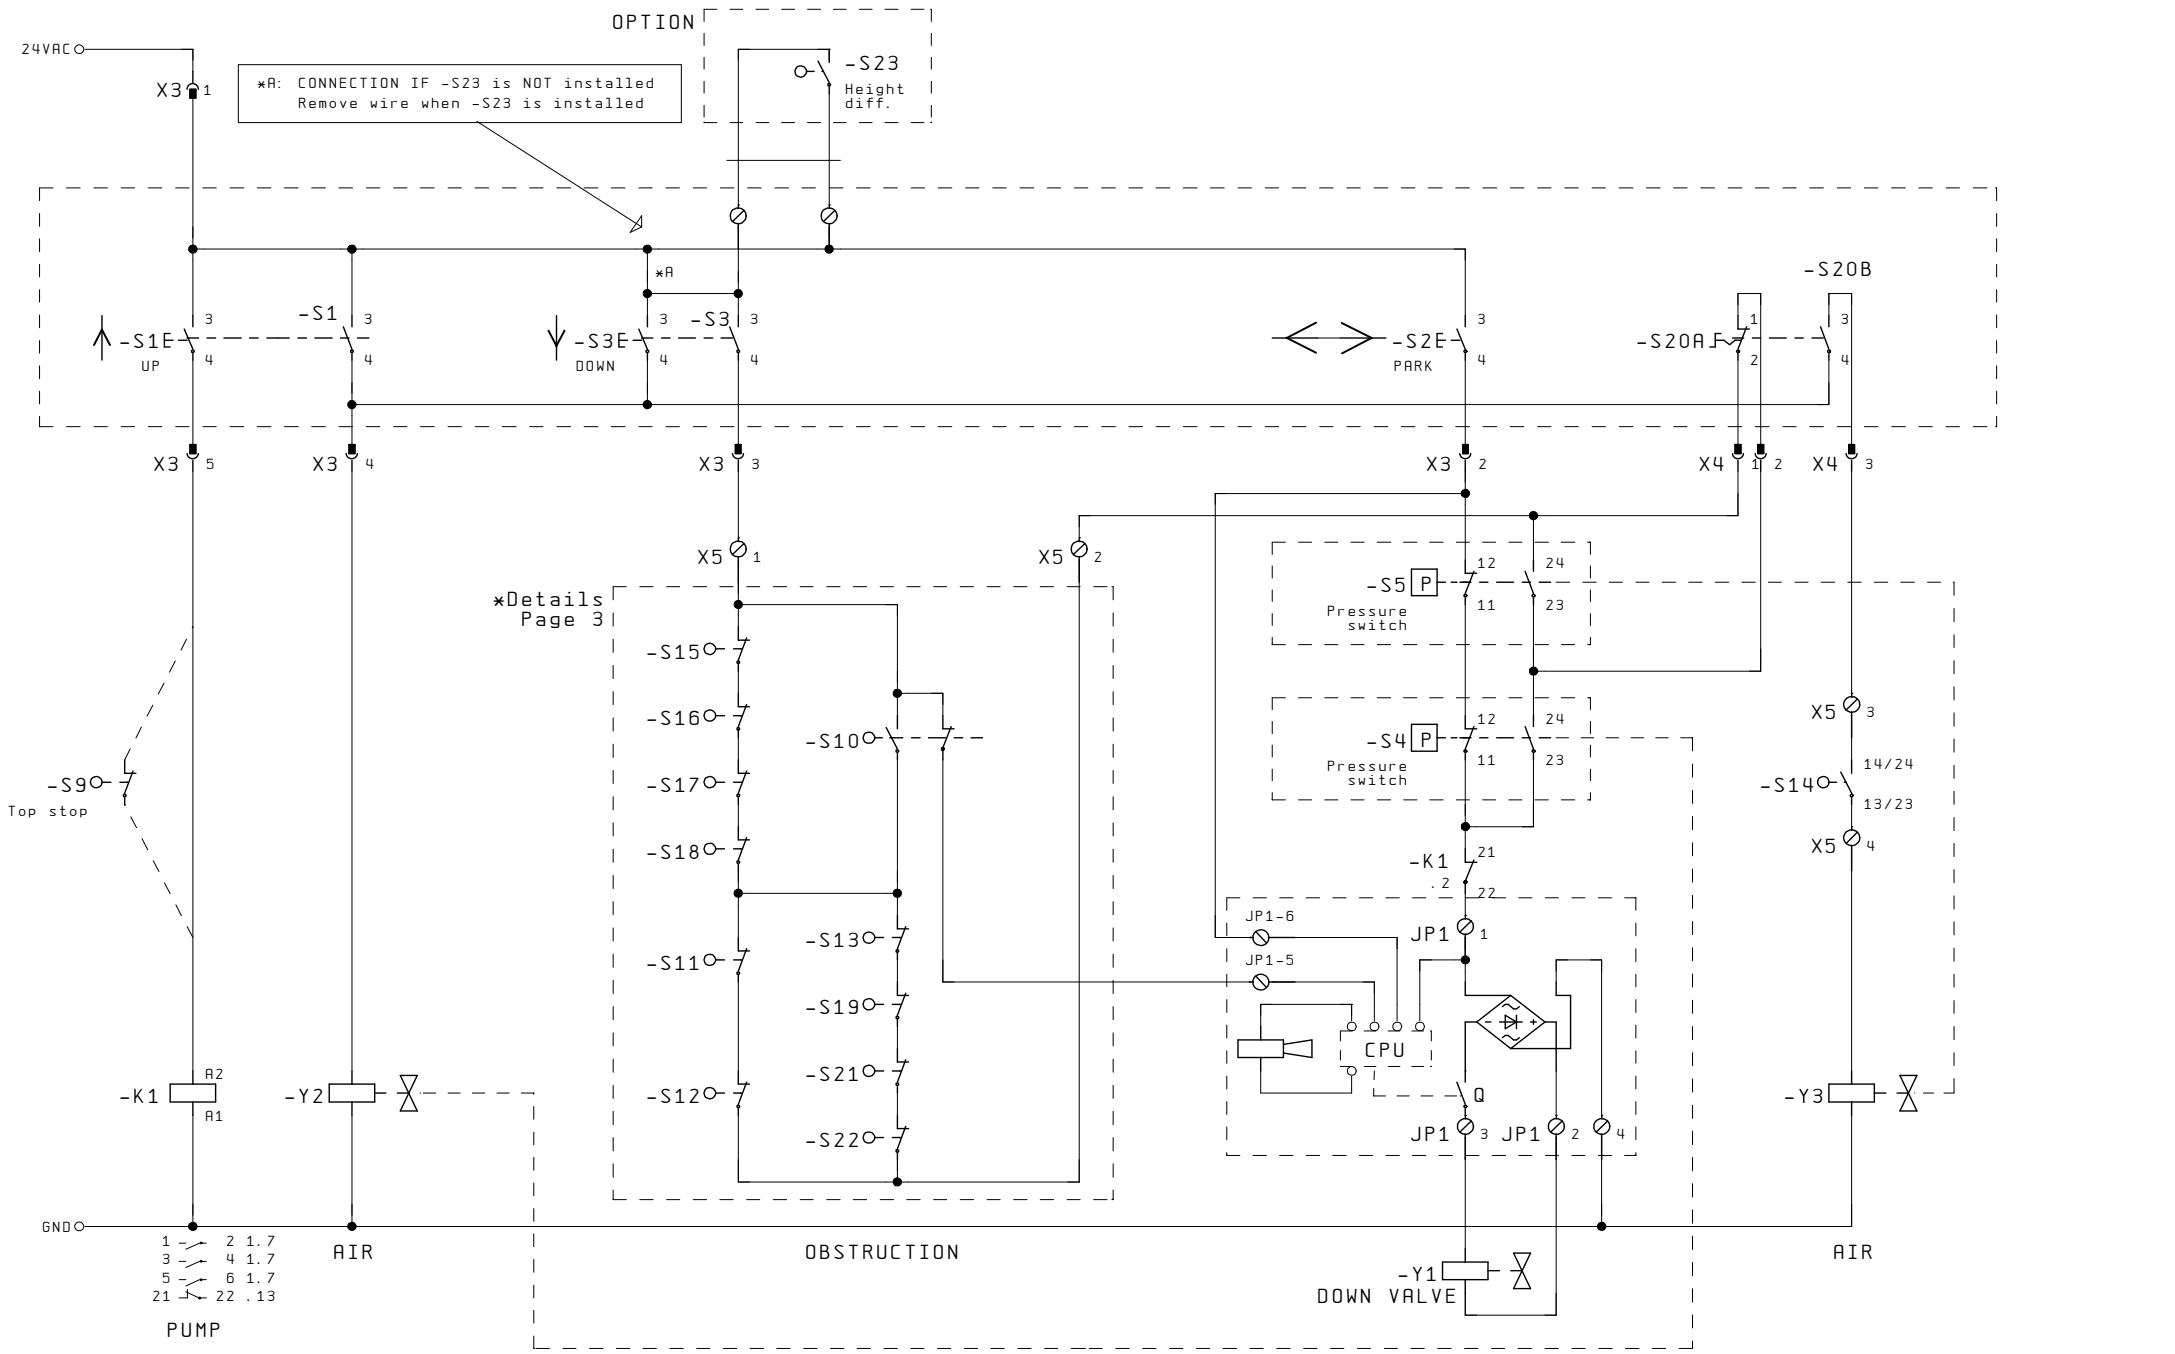

REV.	5
Project date	14. Mar. 2007
Printed	09. Sep. 2019

Nøgleskema - H4

Schematic nr. T50529

Page 2 of 4

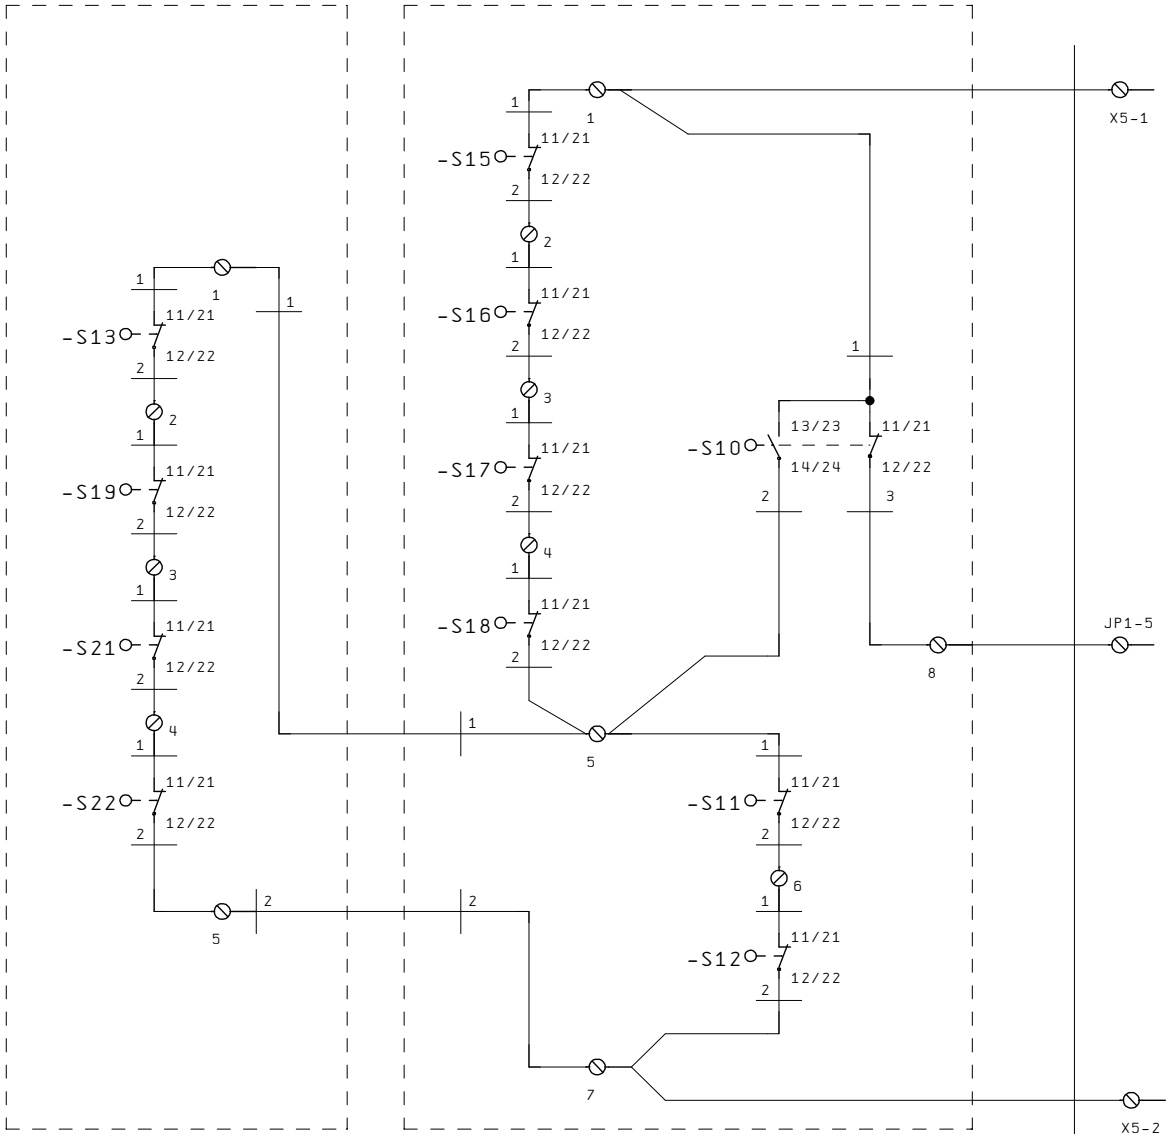

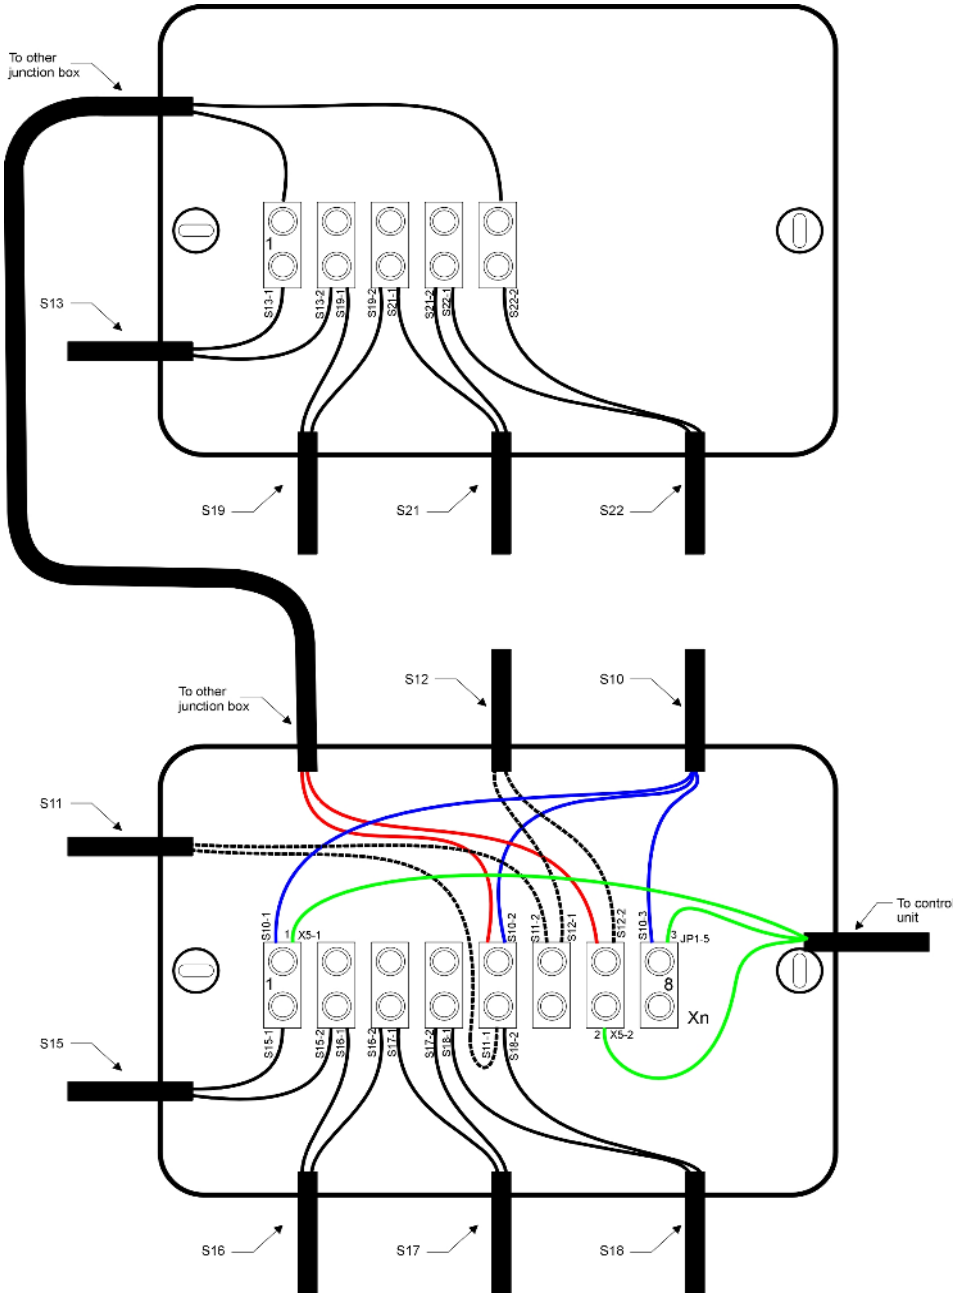

REV.	5
Project date	14. Mar. 2007
Printed	09. Sep. 2019

Nøgleskema - H4

Schematic nr. T50529

Page 3 of 4

Limit switches:

S10: Limit switch for jumping the obstruction system on main lift,
when lift is in bottom position.

S11: Limit switch for obstruction system for wheel free device - rear

S12: Limit switch for obstruction system for wheel free device - front

S13: Safety switch for ratchet when parking front right wheel-free cross beam.

S14: Limit switch for jumping S20 (in order to avoid that ratchets on safety ratchets are pulled, when wheel free device is parked).
"Normally open" contacts has to be used in this switch.

S15: Limit switch for obstruction system on main lift

S16: Limit switch for obstruction system on main lift

S17: Limit switch for obstruction system on main lift

S18: Limit switch for obstruction system on main lift

S19: Safety switch for ratchet when parking front left wheel-free cross beam.

S20: Rotary switch for control of the Y3 valve

S21: Safety switch for ratchet when parking rear right wheel-free cross beam.

S22: Safety switch for ratchet when parking rear left wheel-free cross beam.

S23: Limit switch for Max height difference between wheel-free and platform.